

BISTOON[®]
TILE
INDUSTRIES



Head Office Address: No.858, Meysam 2 St, Payam Blvd, Karaj, IRAN

P.O BOX: 31991-89200 | Tel: +98(26) 3559 | Fax: +98(26)34802899

Factory Address: Bagh Falak Ave, Km 11 Bistoon Rd, Kermanshah, IRAN

P.O BOX: 67441-31933 | Tel: +98(83) 34733310-17 | Fax: +98(83)34733319

www.bistoontile.com | info@bistoontile.com

Polished Collection

Stanley Dark Smoky

Size: 600x1200mm

Thickness: 9mm

Body: Porcelain - White Body

Porcelain tile reinvents itself by creating a new living style in which tradition becomes a source of inspiration for a contemporary look.

Polished porcelain tiles have an additional liquid glass coating applied to their surface, which is between 5-7 microns thick. Glossy porcelain tiles are lighter and thinner than unglazed porcelain ones. Glaze quality has a bearing on the lifespan of the glossed porcelain tile. Bright glazes are denser than dark ones when fired at a high temperature. Polished porcelain tile, which has an additional layer of glass on it, is one of the most moisture-resistant goods. Porcelain tiles with a high sheen and low porosity are common.

/ STANLEY










Stanley Dark Smoky

pristine collection for mesmerizing designs

Gray tile designs are taking the market by storm, and lucky for you, it's easy to jump in on the trend and create a chic gray look in your space. Fashioned in gray floor tiles can be a place of absolute serenity when properly planned. Pulling off a gray space design that incorporates pops of color is easy, you just have to know where to start.

Porcelain | Different color | Rectified | Anti Slip | White Body

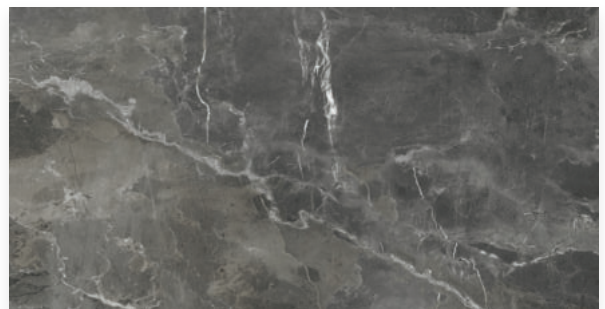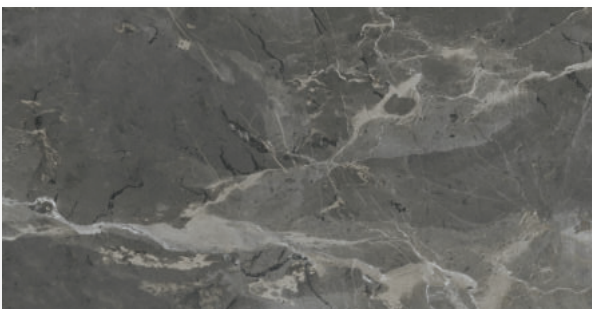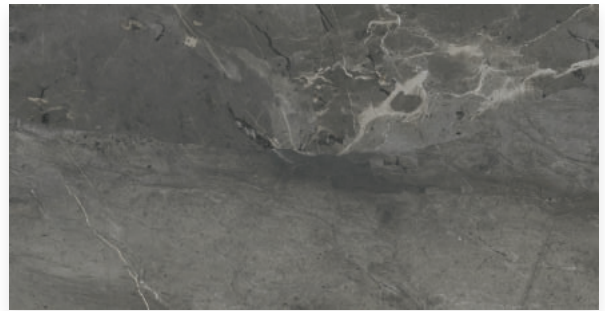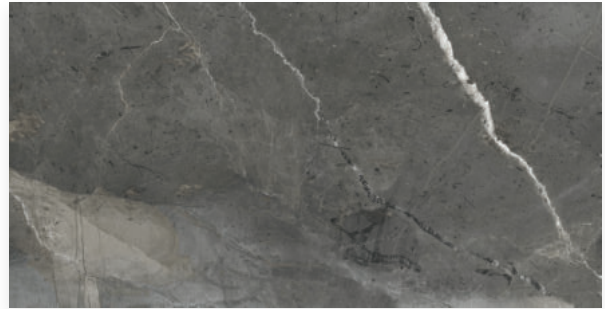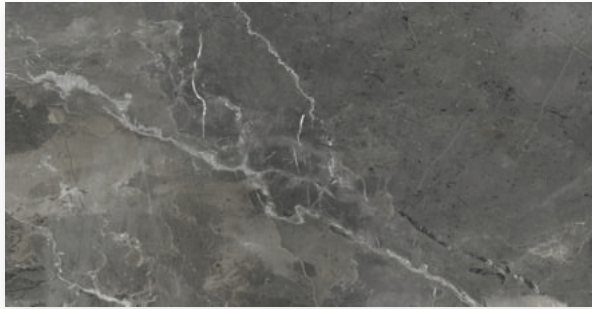

Effect: Nano Polished
Size: 600x1200mm
Thickness: 9mm
Faces: 6



Stanley Light Gray



Stanley Dark Gray

Technical Information

Working Size	600x1200mm
Nominal Size	600x1200mm
Approximate Area	1.44m ²
Number of Tile in Each Carton	2
Type of Use	Indoor Floor
Chemical Resistance	GLB- GB
Resistance to Stain	Class 3
Carton Weight	30Kg
Construction Method	Dry Pressing
Surface Type	Glaze (GL)
Thickness	9 +- 0.5
Water Absorption	BI ₀
Absorption Class	2

Packing List

Pallet specifications	1100x1100 mm
Pcs/Box	2
M ² /Box (m ²)	1.44
Kg/Box (kg)	30
Box/Pallet	67
M ² /Pallet (m ²)	96.48
Kg/Pallet (kg)	1950-2000
Kg/M ² (kg)	20
Kg/Pcs (kg)	14.75
Pallet Dimensions (m ³)	110.110.134
Thick/Pcs (mm)	9 +- 0.5
Pallet/Truck	13-14

Family Is a Value

www.bistoontile.com

Follow "Bistoon Tile" Social Networks

